



## CKD SERIES

### 304 Stainless Steel Open Impeller Pumps

The CKD series open impeller pumps are particularly suitable for high flow/low pressure applications, transferring dirty water containing solids up to 15mm or mixing fertilizers.

- Circulation (-20 to +110°C)
- Dirty/Grey water emptying or transfer
- Mixing and transferring liquid fertilizers, calf milk and other liquids

#### Features

- 304 Stainless steel impeller, pump body & Seal plate
- Long Life Silicon carbide/carbon seal
- EPDM Elastomers (Viton option available)

WASTE WATER



WATER TREATMENT



CALF MILK



INDUSTRY





# CKD SERIES

DAVIES CKD SERIES						
Model	Hp	Kw (P2)	Volts	Phase	Amps	Cap Mfd
CKD-050M	0.5	0.37	230	1	2.4	13
CKD-100M	1.0	0.75	230	1	4.45	20
CKD-150M	1.5	1.1	230	1	6.45	30
CKD-150T	1.5	1.1	400	3	2.48	-
CKD-200M	2.0	1.5	230	1	8.8	40
CKD-200T	2.0	1.5	400	3	3.25	-
CKD-300T	3.0	2.2	400	3	4.82	-
CKD-400T	4.0	3.0	400	3	6.3	-

#### Typical Applications:

- Circulation
- Industrial washing and rinsing
- Transfer

#### Pump Type:

Non self-priming open impeller centrifugal pump for pumping clean or dirty, thin, non-explosive, non-flammable liquid.

#### Motor Type:

- Totally enclosed, fan cooled.
- Rated speed: 2850 RPM - 50Hz
- Single phase voltage range: 220-240V (PSC Type motor)
- Three phase voltage range: 220-240/380-415
- Insulation: Class F
- Protection: IP55
- Single phase versions fitted with Auto reset thermal overload
- Three phase version require user supplied overload to be fitted in installation

#### Operation limitations:

- Maximum ambient temperature: +40°C
- Liquid temperature range: -20°C to + 110°C
- Maximum operating pressure: 8.0bar/115PSI



#### CONSTRUCTION MATERIALS

Description	Material
Pump Casing	304 Stainless steel
Impeller	304 Stainless steel
Shaft	304 Stainless steel
Mechanical seal	Silicon carbide/Carbon
O-Rings/Elastomers	EPDM
Motor Mount bracket/Casing	Aluminium



**PERFORMANCE DATA**

Model	m <sup>3</sup> /h	0	2.4	3.6	6	12	18	24	33	42	48	57	66
	L/M	0	40	60	100	200	300	400	550	700	800	950	1100
CKD-050	H(m)		10	9.5	7.5								
CKD-100					8	7	5						
CKD-150					9.5	10	9						
CKD-200					12.5	12	11	10	8.0	6.5			
CKD-300					15	14	13.5	12.5	11.0	10.0	9.0	7.5	
CKD-400					17.5	16.5	16	15	14	12.5	11.5	9.5	7.5

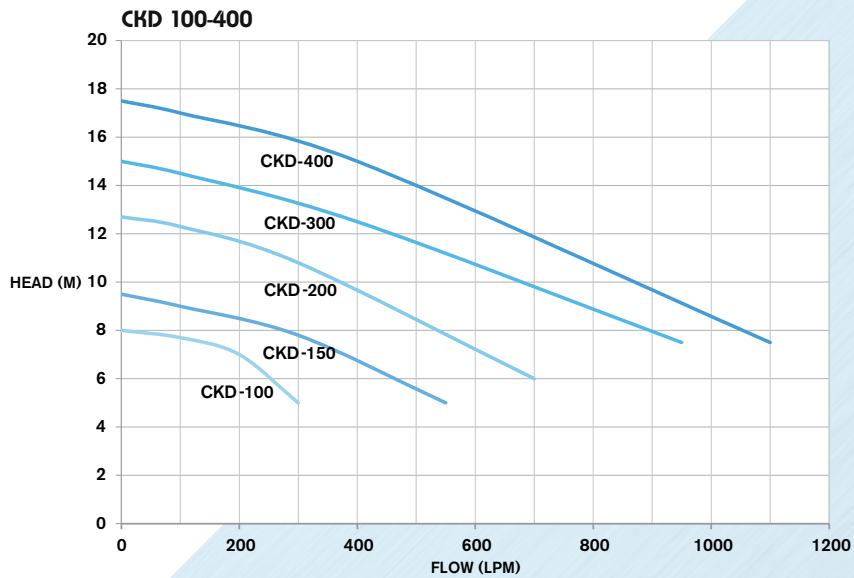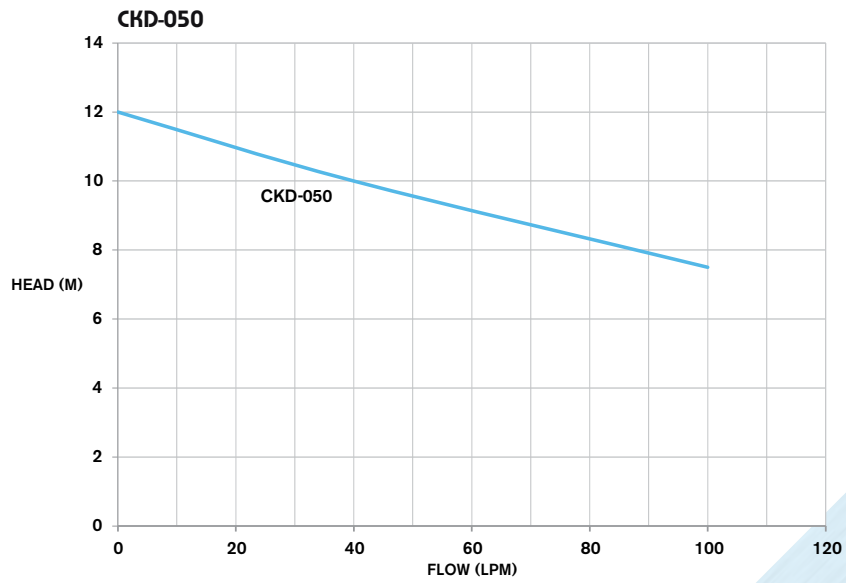






#### DAVIES CKD SERIES DIMENSIONS

Model	A	B	C	C1	F	H	H1	H2	N	S	W	DNA	DNM	HG
CKD-050	52	85	170	-	295	190	88	103	72	7	82	1 ¼"	1"	7.0
CKD-100	74	90	170	20	358	225	108	118	80	9	84	1 ½"	1 ½"	10
CKD-150	82	74	170	20	400	250	120	133	100	9	100	2"	2"	14
CKD-200	82	74	193	20	400	250	120	133	100	9	100	2"	2"	16
CKD-300	82	74	193	20	435	250	120	133	100	9	100	2 ½"	2"	19
CKD-400	82	74	193	20	435	250	120	133	100	9	100	2 ½"	2"	22

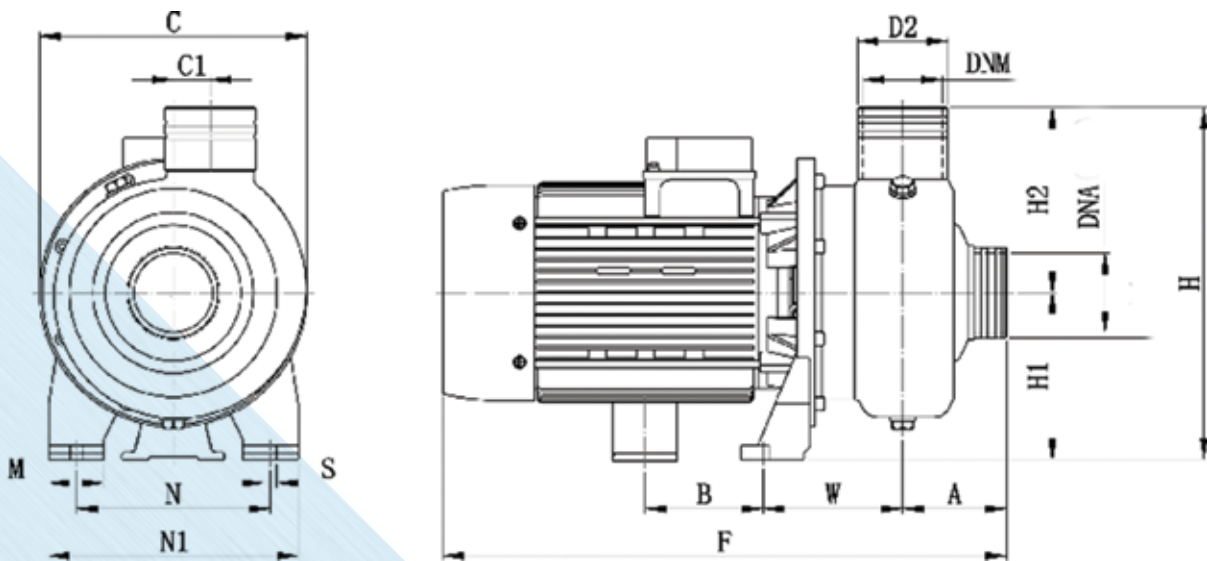

For your nearest dealer please contact Argon Distributors: 0508 634 341

While every effort has been taken to publish correct details in this guide, due to a process of continuous development, no responsibility will be taken for errors, omissions or changes in product specifications. Images are representations only and may differ from actual product. Davies Pumps and the 'dp' logo are registered trademarks of Argon Distributors.