

WATERSWITCH

AUTOMATIC RAINWATER CONTROLLER

RAINWATER HARVESTING



WS1500200

2
YEARS
WARRANTY

FEATURES & BENEFITS

- Watermark approved.
- Automatic water saving device.
- Seamlessly switches between mains and rainwater tank.
- No mixing of mains and tank water.
- Dual non-return valve incorporated.
- Low pressure drop through device.
- Normally open solenoid allows mains water to flow as normal in case of power outage.
- Max. flow - >200 lpm (via pump inlet).

APPLICATIONS

- Use your rainwater for:
- the washing machine,
 - toilet flushing,
 - car washing,
 - garden watering.

OPERATING CONDITIONS

Suitable for use with mains and clean water without solids or fibres in suspension.

Fluid:	Water.
Minimum flow rate:	2 lpm.
Maximum water temperature:	40°C.
Minimum water temperature:	1°C.
Maximum ambient temperature:	40°C.
Minimum ambient temperature:	1°C.
Minimum mains pressure:	100kPa.
Maximum mains pressure:	1000kPa.



Approval number WMKA 21068
in accordance with ATSS200.477-2006.

Distributed By:**ARGON**
DISTRIBUTORS LTD


Freephone 0508 634 341 | Fax 09 634 7417
7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand

ELECTRICAL DATA


Type	Type of current	Voltage $\pm 10\%$	Maximum electrical load	IP rating
WS1500200	1-phase	230	10 A	IP44

DIMENSIONS

Type	Unit L x W x H	Weight approx.	Packed L x W x H	Packed weight approx.	Inlet / outlet ports
WS1500200	243 x 112.31 x 214.5mm	1.7 kg	280 x 275 x 135mm	2 kg	1" BSP (female)

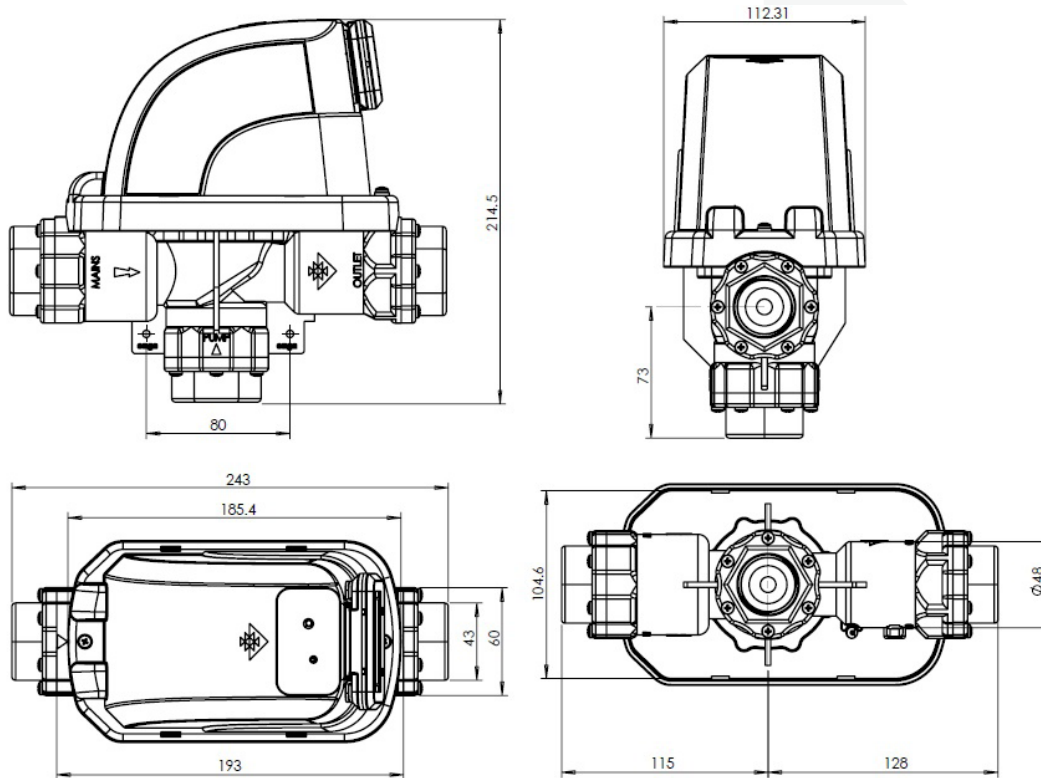

PERFORMANCE

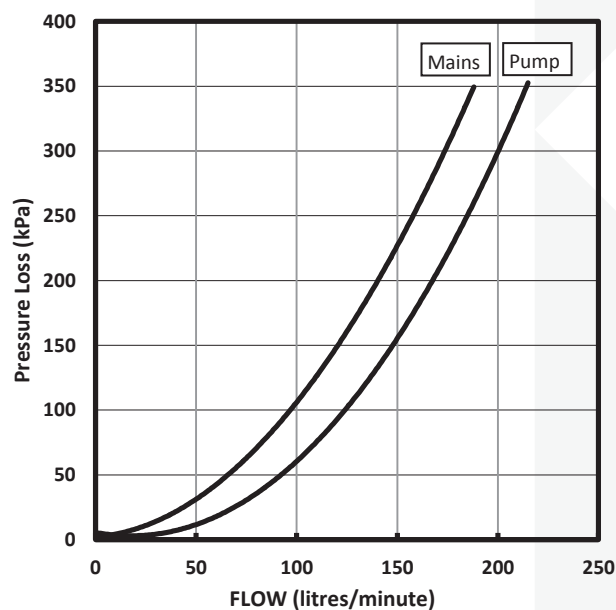

Distributed By:

ARGON
DISTRIBUTORS LTD

Freephone 0508 634 341 | Fax 09 634 7417
7 Monier Pl, Mt Wellington, Auckland 1060, New Zealand