

# CHEMFLO PLUS

## User Manual

### ChemfloPlus Water Management System



# Table of Contents

WHAT IS IN THE BOX .....	01
HOW IT WORKS .....	03
INITIAL POOL BALANCE .....	09
INSTALLATION GUIDE & DIAGRAMS .....	09
FRONT PANEL .....	10
NAVIGATING THE MENU SYSTEM .....	10
TIMER MENU .....	10
ORP MENU .....	09
pH MENU .....	09
STATUS INDICATOR, WARNINGS AND SAFETY SHUTDOWNS .....	10
MAINTENANCE .....	10
TROUBLESHOOTING .....	10

## **IMPORTANT:**

***If the power cord is damaged the unit must be returned to Waterco for repair.***

***Always read the instructions and warnings on chemical containers before using chemicals.***

**Serial Number .....**

**Date of Installation .....**

**Installed by .....**

## WHAT'S IN THE BOX?

- Mounting brackets; top and bottom
- Multi-electrode (probe)
- ChemfloPlus Power Supply and Mains Cable
- Tubing
- Dual peristaltic pump module
- User Manual
- Injection manifold
- Mounting hardware (raw plugs, screws and paper template)

## IMPORTANT SAFETY MEASURES:

- Always add concentrated chemicals to water – not the other way around!
- Don't allow chemicals to mix – dangerous, highly corrosive fumes produced.
- Always wear protective clothing, footwear, gloves and eye protection when handling pool chemicals to avoid injury.
- If a spill occurs, wash the affected area with fresh water immediately and seek medical attention.
- Work in a well-ventilated area and avoid inhalation of fumes.
- Read and follow safety instructions on chemical drums.

## HOW IT WORKS:

The ChemfloPlus continuously analyses pool water chemistry while your pool system is running. The base model has two dosing pumps that dose liquid chlorine and acid to the pool water flow in response to the water analysis from the probe.

The ChemfloPlus can also be used to control a Salt Water Chlorinator (SWC) with and without extra available dosing from the chlorine dosing pump. The chlorine dosing pump is always available for manual dosing.

When both the SWC and the chlorine dosing pump are enabled the dosing pump is activated at an ORP approximately 50mV below the set point. It will then dose regularly until the ORP climbs to a point that the SWC can take it the rest of the way. This results in the doser only covering extra high chlorine demands.

**Note: the filter system should always be running when the pool is being used.**

### Oxidation Reduction Potential

The ChemfloPlus measures how much chlorine is in pool water by measuring the ORP of the water.

ORP stands for Oxidation Reduction Potential. Chemicals like chlorine destroy pathogens (eg harmful bacteria) in water by oxidising them.

The level of oxidation available in the water can be measured chemically with an ORP sensor contained in the ChemfloPlus's multielectrode (probe). This produces a voltage related to the ORP of the water, which is a measure of the effectiveness of chlorine in the water.

Varying the ORP will affect how long it takes to destroy harmful bacteria in pool water. For example, if ORP is maintained at 650mV, E.coli type bacteria will be destroyed in around one second. However, if the ORP is lowered to 550mV, the same organisms may take up to 2 hours to be eliminated.

### pH Control

When chlorine is added to water the pH always changes – this is because chlorine is not a neutral chemical. The pH will slowly rise as chlorine is added to the water. A rise in pH greatly reduces the effectiveness of the chlorine as a sanitiser, so it is important to ensure that the pH remains in the correct range.

The pH of the water can be lowered by the addition of acid – and your ChemfloPlus does this automatically. The ChemfloPlus multielectrode (probe) measures the pH of the water and doses the pool with small amounts of acid to keep the pH in the correct range.

## INITIAL POOL BALANCE

Before you begin using the ChemfloPlus make sure your pool water is balanced as follows:

### Chlorine

If it is a new installation, add enough chlorine (liquid or granular) to achieve a reading of 3ppm on an appropriate test kit.

### Stabiliser

If the pool is outdoors, it is vital that stabiliser (also known as cyanurate and cyanuric acid) be added and maintained at 40ppm to 60ppm. This compound reduces chlorine destruction due to sunlight. However, too much stabiliser will reduce the effectiveness of chlorine and can result in poor quality water so ensure stabiliser does not exceed 80ppm.

Good stabiliser level keeps good chlorine levels and reduces maintenance.

### pH

For chlorine to be effective, the pH must be within a certain range. This is usually between 6.8 (fibreglass/liner pools) or 7.2 (concrete/plaster) and 7.8.

Adjust pH down with acid – powder, liquid sulphuric or liquid hydrochloric. Be very careful with acid as it can be harmful and corrosive.

### Total Alkalinity (TA)

Total alkalinity is also known as carbonate hardness or TA for short. The recommended level is between 80 and 120ppm.

TA is related to pH in that it stops the pH from varying quickly with small additions of acidic or alkaline chemicals. When the TA is low it is almost impossible to control the pH.

To raise the TA, buffer (sodium bicarbonate) is added. This must be done slowly as buffer will also cause the pH to rise. As an approximate rule every increase of 20ppm of TA will also cause a 0.1 rise in pH. Once buffer is added it should be left to mix in the pool for a few hours before reducing the pH.

### Phosphates and Nitrates

Phosphate and ammonia nitrogen will make your garden green – and they will do the same thing to your pool. Check for phosphates and add phosphate remover if necessary. Don't let fertiliser get into your pool! Phosphates are also in some cleaning products – check the label if using around your pool.

### When Controlling a Salt Water Chlorinator

Follow the directions for the initial balance for your SWC unit – the difference is likely to only be the addition of salt or minerals. Note that the ChemfloPlus unit will turn the power to the SWC unit on and off – the SWC unit must be capable of functioning in this manner and should be set to manual operation only (not automatic).

# INSTALLATION GUIDE

## Choosing a good location

The ChemfloPlus is manufactured from weather resistant materials and is designed for operation in full sun and rain. However, your ChemfloPlus will benefit if it is protected from the weather. The ChemfloPlus Power Supply should not be mounted close to where chemicals are stored (eg acid and chlorine) as vapours from these chemicals are corrosive and may damage the electronic controls within the unit.

Insect intrusion (particularly ants) can cause problems with all equipment. Ensure that the pool equipment area is kept free of insects as much as possible. Insect intrusion is not covered under the warranty.

## Installing the ChemfloPlus Controller

Locate the ChemfloPlus Power Supply close to the filtration pump so that it may be connected easily. Connect the ChemfloPlus Power Supply to the mains power outlet of the pool area and make sure this outlet meets all applicable Australian Standard at the time of installation.

Mount the ChemfloPlus Power Supply at least 1.5m above the ground and at least 3m from the pool water. A mounting template has been provided with the ChemfloPlus that shows you where to place screws on either a wall or post.

The PUMP socket outlet in the base of the ChemfloPlus Power Supply is dedicated to the filtration pump only. Do not use a double adaptor to connect another pump as this will overload the system and void warranty.

Your ChemfloPlus has two other power outlets on its base, which can be used to run lighting or an SWC unit (or other pool equipment). These outlets are also timed, so accessories can be set to come on and turn off automatically.

## Installing the Injection Manifold

The injection manifold should be installed on the return (pressure) side of the pump, after accessories such as heater, but before the chlorinator cell if fitted. It can be plumbed in as an elbow or an in-line fitting. Ensure that the water flow is in the correct direction (as marked on the injection manifold).

## Installing the Probe into the Injection Manifold

The probe has a bayonet fitting. To install the probe, simply insert it into the injection manifold and twist to lock the bayonet fitting. Ensure that the o-ring seal is not twisted or out of place.

# INSTALLATION DIAGRAM

## CONTROL POWER CONNECTIONS

- RED GPO = POOL PUMP
- GREEN GPO = SALT WATER CHLORINATOR
- BLACK GPO = AUXILIARY DEVICE

## INJECTION MANIFOLD INSTALLATION


- THE INJECTION MANIFOLD MUST BE INSTALLED ON THE OUTLET/PRESSURE SIDE OF THE POOL PUMP AFTER THE POOL HEATER (FOLLOWING FLOW DIRECTION)
- THE WHITE CAP WITH INJECTION SWIVEL MUST ALWAYS BE LOCATED IN A VERTICAL POSITION
- THE INJECTION MANIFOLD CAN BE INSTALLED IN EITHER OF THE ARRANGEMENTS BELOW

## DOSING PUMP SYSTEM INSTALLATION

- POSITION DOSING PUMP AS CLOSE AS POSSIBLE TO INJECTION MANIFOLD OR TAPPING BAND
- MOUNT PUMP 450mm - 1500mm OFF GROUND

## CELL INSTALLATION

- THE CELL MUST BE INSTALLED ABOVE THE HEIGHT OF THE FILTER AND AFTER THE INJECTION MANIFOLD (FOLLOWING FLOW DIRECTION)

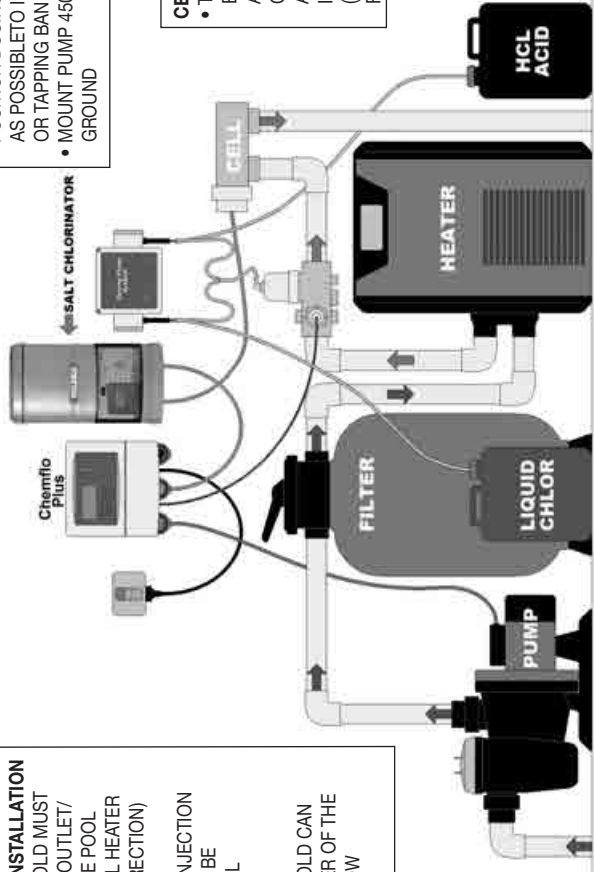

## Chemical drums

Position the chemical drums in a safe and secure location, preferably about 2 metres from the ChemfloPlus. Ensure you have the right chemicals for your pool and that chemicals have been diluted if necessary. Always take great care when dealing with the chemicals.

## Installing the Peristaltic Pumps (Dosing Pump Models)

Mount the peristaltic pumps unit adjacent to the ChemfloPlus Power Supply, as it is hard-wired to this power supply.

Cut lengths of tubing that will reach from the base of each peristaltic pump to the injection manifold. Connect one end of the tubing to the outlet side of the peristaltic pump (the direction of flow is indicated by an arrow on the front cover of the pump.) Connect the other end of the tube to the injection point on the injection manifold.

Cut another length of tubing that will reach from the base of the peristaltic pump to the base of the acid drum. Position the acid drum in a safe and secure location, preferably about 2 metres from the ChemfloPlus.

Connect the one end of this tube to the inlet side of the peristaltic pump (the direction of flow is indicated by an arrow on the front cover of each peristaltic pump.)

Drill an 8mm hole in the lids of the chemical drums and pass the tubing through the hole in the drum lid. Place a sinker on to the end of the tubing that will be in the drum and then attach the drum filter. Note that the drum filter incorporates a non-return valve to prevent back-flow into the chemical drum.

Before placing the tubing into the drum, measure the tubing against the outside of each drum and wrap several turns of PVC tape around the tubing above the drum lid so that the drum filter will be 10-15mm above the bottom of the drum. Lower the drum filter and sinker into the drum and screw on the lid.

# THE CHEMFLOPLUS FRONT PANEL

## ChemfloPlus Display

The ChemfloPlus uses a four line LCD display to provide the user with information.

### LCD Display

Line 1	<b>15:27    NORMAL Auto</b>
Line 2	<b>AutoON → AutoOFF@21:00</b>
Line 3	<b>ORP=670mV    SET=650mV</b>
Line 4	<b>pH=7.5        SET=7.6</b>


READ OPERATION MANUAL FOR DETAILED INSTRUCTIONS



- Line 1** shows the current time and the mode of operation.  
In the example above, line 1, tells you that the time is 3:27pm and the ChemfloPlus is operating in “Normal Automatic mode”  
Note that the ChemfloPlus displays the time using a 24 hour clock.
- Line 2** shows timer information.  
In the example above, line 2 tells you that the “unit is turned ON and will turn OFF automatically at 21:00 (9pm)”
- Line 3** displays ORP (Chlorine) information.  
In the example above, line 3 tells you that the current ORP is 670mV with the unit set to provide 650mV
- Line 4** displays pH information.  
In the example above, line 4 tells you that the current pH is 7.5 with the unit set to provide 7.6.

## CHEMFLOPLUS OPERATIONAL BUTTONS

Your ChemfloPlus has 5 buttons that allow you to control the various functions available via the ChemfloPlus Menu system.

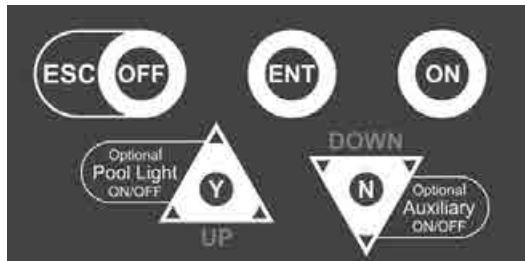

Each button is labelled with its primary function either on the button itself, or adjacent to it. Secondary functions are labelled within a curved white outline next to the relevant button.

The buttons are backlit to show which are active at any given time, although the ESC/OFF button is always available to take you back to the home screen.

### ON Button

#### Turn the System On Manually

Press the ON button once to switch the ChemfloPlus and the pool pump on manually. The ChemfloPlus will default back to AUTO and turn itself off automatically at the end of the next programmed FILTER CYCLE (and this time will be displayed on the LCD).

### **Increasing Manual Run-time in Hourly Increments**

Press the ON button repeatedly (or hold the button down) to increase the manual run time in hourly increments. The run time is displayed on the LCD. When the desired run time has been reached, press the ENT button to confirm your selection and the system will commence operation.

### **ESC/OFF Button**

#### **Turn the System Off Manually**

If the ChemfloPlus and pool pump are running, pressing this button will turn them off manually. The ChemfloPlus will automatically turn on again at the start of the next FILTER CYCLE (and this will be displayed on the LCD).

#### **Return to Home Screen**

If you have unintentionally accessed a ChemfloPlus Menu that you don't actually require, pressing the ESC/OFF button allows you to return to the home screen at any time.

### **ENT Button**

Use this button to enter the ChemfloPlus Menu system and to access the various options in each Menu. Use the Y/UP and N/DOWN buttons to scroll through menu options and when your desired menu option is displayed on the LCD, press ENT to access that option.

### **Y/UP Button and Optional Pool Light**

If you have accessed the ChemfloPlus Menu by pressing the ENT button, press the Y/UP button to scroll upwards through the various menu options. Some menu options will prompt a yes or no answer. If you wish to answer "yes", press the Y/UP button.

If your ChemfloPlus also controls your pool lighting (optional), you can turn the lights on or off manually by pressing the Y/UP button. For multi-coloured lights, hold the Y/UP button down to cycle through the various colours and release once the desired colour is reached.

# NAVIGATING THE CHEMFLOPLUS MENU SYSTEM

There are three aspects to the general ChemfloPlus Menu system – the Timer Menu, the ORP (Chlorine) Menu and the pH Menu.

Access the ChemfloPlus Menu system by pressing the ENT button and following the prompts on the LCD. If you find you have ended up in a part of the Menu system unintentionally, you can return to the Home Screen by pressing the ESC/OFF button at any time.

Use the Y/UP and N/DOWN buttons to scroll through the various menu options until the desired option is displayed on the LCD. Use the ENT button to confirm that you wish to select that option.

Once accessed, use the Y/UP and N/DOWN buttons to adjust operational settings up or down – and confirm adjustments by pressing ENT. To cancel any adjustments, simply press ESC/OFF to return to the Home Screen.

## Advanced Settings Menu

The Advanced settings are accessed by holding down the ESC/OFF button for 4 seconds. ADVANCED MENUS will appear in the display – press ENT to enter.

Some of the Advanced Settings comprise:

- POOL – used to store information on pool volume and whether it is concrete or fibreglass
- SYSTEM DATA - shows service information
- FILTER CYCLES - allows for up to 4 Filter Cycles to be activated and is very useful for seasonal timer adjustments.
- AUX - controls timed operation of auxiliary power outlet
- FULL MANUAL ON or AUTO TIMER ON – use when the ChemfloPlus is being run as a “slave” to another controller.

It should be noted that some of these settings can affect the basic operation of the unit and are for the use of technicians – if in doubt do not make any changes.

# TIMER MENU

## Setting the time

Once you have installed your ChemfloPlus and turned it on, you will need to set the correct time on the ChemfloPlus's 24 hour clock.

First, access the Menu System by pressing the ENT button.

The LCD will display the word TIMER MENU. Select this by pressing the ENT button once more.

Line2 on the LCD will now read SET TIME HOURS. Press ENT to select this option and then use the Y/UP and N/DOWN buttons- to adjust the hours on the LCD. Confirm the correct hours value by pressing ENT again.

The LCD will now show SET TIME MINUTES. Adjust the minutes using the Y/UP and N/DOWN buttons. When complete, press ENT to return to normal operation.

## ADJUST CYCLES Sub-Menu

Your ChemfloPlus has two filter cycles pre-programmed as factory defaults as follows:

Filter Cycle 1:	ON at 6:00 (6am)	OFF at 08:00 (8am)
Filter Cycle 2:	ON at 18:00 (6pm)	OFF at 20:00 (8pm)

You can change the start and finish times of each filter cycle to meet your sanitiser requirements and to suit your lifestyle.

To adjust filter cycle start and finish times, press ENT to access the ChemfloPlus Menu system. Press ENT again to select the TIMER menu and then scroll down using the N/DOWN button until ADJUST CYCLES is displayed on the LCD.

Select this option by pressing ENT and the LCD will show the start (ON) time of the filter cycle being adjusted. Use the Y/UP and N/DOWN buttons to adjust the start time. Press ENT to confirm your selection and then the LCD will show the end(OFF) time for that filter cycle. Adjust the OFF time in the same way as the ON time and press ENT to confirm.

After ON and OFF times for the first filter cycle have been adjusted, the ON time for the second filter cycle is shown on the LCD. This can be adjusted in the same way, or if you do not wish to make any changes, simply press ENT to confirm the time shown on the LCD. Follow the same process to either adjust or confirm the OFF time for the second filter cycle, and once this has been confirmed the LCD will display the home screen.

## Running Times

We recommend your system be operated for **at least 4 hours per day and always run the system when using the pool.**

As sunlight destroys chlorine, it is recommended that the ChemfloPlus be run mostly in the evening.

Chlorine is added for sanitation but the filter is needed to remove pollutant particles (dust, sand etc) and keep the water looking good. The filter must operate for a reasonable number of hours per day to remove pollutants. If there are adverse local conditions – such as windborne dust and debris - the chlorine demand will be higher than normal and you will likely need to operate the system for longer periods to adequately filter the water.

## Optional LIGHT Timer Sub-Menu

You can use your ChemfloPlus to turn your pool or garden lighting on and off automatically, you can set the ON and OFF times using the light timer menu.

Press ENT to access the ChemfloPlus Menu system. Press ENT again to select the TIMER menu and then scroll down using the N/DOWN button until LIGHT MENU is displayed on the LCD.

Line2 on the LCD will now read “AUTO? Y/N”. To enable automatic light operation press the Y/UP-button. Line2 will read “Auto ON” for short period before displaying “ON hh:mm”.

Adjust the ON time using the Y/UP and N/DOWN-buttons and confirm by pressing ENT. The LCD will now prompt you to set the OFF time, which is accomplished using the Y/UP and N/DOWN-buttons as before. Press ENT to confirm the new OFF time and the LCD will return to the home screen.

To disable automatic light operation, access the LIGHT menu in the way described above and when asked “AUTO? Y/N” - press the N/DOWN button. Line2 will read “Auto OFF” for short period then the system will return to normal operation and the light can only be operated manually (see below for how to do this).

## Manual Light Operation

If the ChemfloPlus is turned on, the light can be turned on or off manually by pressing the Y/UP-button.

If you have multi-coloured LED lights that cycle through different colours and requiring a power pulse to change effects, you can hold down the Y/UP-button to cycle through the options and release when the desired colour or effect is achieved.

## ORP (Chlorine Menu)

### Accessing the ORP Menu

Access the ChemfloPlus Menu System by pressing ENT. Use the Y/UP or N/DOWN button to scroll through the main menu until ORP MENU is displayed on the LCD. Press ENT to select.

### Manual Feed

Having accessed the ORP menu, the LCD will ask “Manual Feed Y/N?”. Press Y/UP to select and the display will read “FEED 5 mins/75mL”.

You can increase the amount of the dose by pressing the Y/UP button until the desired dose amount is displayed. (Note: the dose volume displayed is an estimate only)

Press ENT and the peristaltic pump will commence feeding liquid chlorine.

### Adjusting the Set Point

The ORP Set Point is the value in millivolts that the ChemfloPlus will adjust your pool water to. You can adjust the ORP Set Point via the ORP Menu.

Enter the ORP Menu as described above, and press the N/DOWN button when asked whether you wish to do a manual feed and then again when asked if you wish to do a superchlorination. The LCD will then read “ADJUST SET POINT Y/N?” Press Y/UP to select this option and then the LCD will display the current set point. Adjust this using the Y/UP or N/DOWN buttons. Confirm the adjusted set point by pressing ENT. The new set point will then be displayed on the right hand side of line 3 of the LCD.

### SWC (AUX) Settings – for control of a Salt Water Chlorinator

The SWC (AUX) is off by default. To turn it ON simply press Y/UP. You will then be prompted to keep the chlorine dose pump ON too. If you only require the SWC unit to be enabled press N/DOWN to disable the automatic chlorine dosing pump – note that it is still available for manual dosing. Otherwise press Y/UP to allow automation of both systems.

When both systems are enabled the chlorine dosing is designed to only dose when the ORP has fallen far below the set point. This means that the chemical dosing will occur at times of high demand.

### Adjust ORP Control ON or OFF

To disable the ORP System (or re-enable it if it has been disabled) you need to access the ORP menu and work your way through the MANUAL FEED, SUPER CHLOR and ADJUST SET POINT questions – pressing the N/DOWN button in response to each question.

The LCD will then read “ADJUST ORP CONTROL TURN OFF? Y/N” (if the system is ON) or ADJUST ORP CONTROL TURN ON? Y/N” (if the system is OFF). If you press Y/UP, the system will turn on (or off depending on its current status). If you answer N/DOWN to either question, the LCD will return to the home screen.

## pH MENU

### Accessing the pH Menu

Access the ChemfloPlus Menu System by pressing ENT. Use the Y/UP or N/DOWN button to scroll through the main menu until pH MENU is displayed on the LCD. Press ENT to select.

### Manual Feed

Having accessed the ORP menu, the LCD will ask "Manual Feed Y/N?". Press Y/UP to select and the display will read "FEED 5 mins/75mL".

You can increase the amount of the dose by pressing the Y/UP button until the desired dose amount is displayed. (Note: the dose volume displayed is an estimate only)

Press ENT and the peristaltic pump will commence feeding liquid chlorine.

### Adjusting the Set Point

The pH Set Point is the pH that the ChemfloPlus will adjust your pool water to. You can adjust the pH Set Point via the pH Menu.

Enter the pH Menu as described above, and press the N/DOWN button when asked whether you wish to do a manual feed. The LCD will then read "ADJUST SET POINT Y/N?" Press Y/UP to select this option and then the LCD will display the current set point. Adjust this using the Y/UP or N/DOWN buttons. Confirm the adjusted set point by pressing ENT. The new set point will then be displayed on the right hand side of line 3 of the LCD.

### Calibration and Re-setting Factory Defaults

If your ChemfloPlus consistently displays a pH reading different from that obtained by manual testing with a quality test kit, it may be necessary to re-calibrate the multi-electrode (probe). The instructions below assume the probe is measuring a pH of 7.8.

**Caution: do NOT re-calibrate the probe until identical pH readings have been obtained from at least three tests from around the pool. You will need to calibrate the probe to the pH value obtained from these test kit results.**

Enter the pH menu as described previously and press the N/DOWN button when asked whether you want to do a manual feed, and then again when asked whether you wish to adjust the set point.

The LCD will then read "CALIBRATE PROBE?". Press Y/UP to select this option and the LCD will read "PROBE Ph = 7.8 ADJUST TO +0.0". Use the Y/UP button to increase the adjusted value to the required level. Press ENT to confirm the adjustment and after a few seconds the ChemfloPlus will revert to normal operation and the home screen will display the new pH value.

## Adjust pH System ON or OFF

To disable the pH System (or re-enable it if it has been disabled) you need to access the pH menu and work your way through the MANUAL FEED, ADJUST SET POINT and CALIBRATE PROBE questions – pressing the N/DOWN button in response to each question.

The LCD will then read “ADJUST pH CONTROL TURN OFF? Y/N” (if the system is ON) or ADJUST pH CONTROL TURN ON? Y/N” (if the system is OFF). If you press Y/UP, the system will turn on (or off depending on its current status). If you answer N/DOWN to either question, the LCD will return to the home screen.

Note: Turning off the supply of acid is not normally necessary and could lead to unbalanced pool water that is unsafe to swim in. Waterco recommends that you seek advice from a qualified professional prior to disabling the pH system.

## CHEMFLOPLUS STATUS INDICATORS, WARNINGS AND SAFETY FEATURES

### Normal Operation – Green Status Indicators

When the ChemfloPlus is operating normally and ORP and pH readings are within the correct range, a green status indicator will be illuminated and the LCD will indicate the readings.

***Note: it is the pool owner's responsibility to monitor the pool and periodically confirm the ChemfloPlus's readings with a good quality test kit. Remember that the ChemfloPlus is only able to balance pH and Chlorine levels – but you need to ensure other factors such as stabiliser levels and total alkalinity are within the correct range (see page 6 for details).***

### Low Chlorine

If the ORP falls significantly below the set point, this indicates that the chlorine levels in the pool have fallen and dangerous pathogens in the water are not being destroyed rapidly.

The ChemfloPlus will warn of low chlorine with a red status indicator and the word “low” will be displayed on the ORP line (line 3) of the LCD.

Possible causes include:

- An empty chlorine drum
- Faulty peristaltic pump
- Low levels of stabiliser
- High pH
- Filter requires backwashing
- The multi-electrode (probe) may require cleaning (see page 17 for details)

If each of these factors is addressed, the ChemfloPlus will dose the pool with chlorine until the set level is achieved – at which point the status indicator will revert to green and the warning will no longer be displayed on the LCD.



## High Chlorine

If the ORP rises significantly above the set point, a red status indicator will be illuminated and the word “High” will appear on the ORP line (line 3) of the LCD.

Possible causes include:

- Manual overdosing (superchlorination)
- Faulty peristaltic pump
- The multi-electrode (probe) may require cleaning (see page 24 for details)
- Low pH (too much pool acid)
- High Total Dissolved Solids (TDS)

There is no simple way to reduce high chlorine levels quickly. However, chlorine levels will eventually reduce over days (or weeks), particularly if the pool is exposed to sunlight.

## Low pH – (Excess Acid)

If the pH of the water drops below the set point, a red status indicator will be illuminated and the words “LOW pH” will be displayed on the LCD.

The ChemfloPlus will automatically prevent any further acid being added to the pool until the pH is brought back into the correct range by the addition of sodium carbonate or sodium bicarbonate.

Possible causes include:

- Manual overdosing
- Excessive rainfall
- Faulty peristaltic pump
- The multi-electrode (probe) may require cleaning (see page 17 for details)
- Low Total Alkalinity
- Poor pool water circulation

## Safety Shutdown

If the pH falls below 5.8 the ChemfloPlus will shut down pump operation to ensure no more acid gets into the pool.

## High pH – (Insufficient Acid)

If the pH rises significantly higher than the set point, a red status indicator will be illuminated and the words HIGH pH will be displayed on the LCD.

Note that a high pH can drastically reduce the ORP of the pool water, and therefore reduce the effectiveness of the sanitiser. It is important to restore the pH balance as soon as possible by adding acid to the pool.

Possible causes include:

- The acid drum is empty
- The pool has been superchlorinated recently
- The pool has a new plaster lining (very alkaline) demanding more acid than can be supplied by the ChemfloPlus
- Faulty peristaltic pump
- Filter requires backwashing
- Multi-electrode (probe) may require cleaning (see page 24 for details)
- Injector nozzle is blocked
- Venturi system (if fitted) is blocked

If each of these factors is addressed, the ChemfloPlus will dose the pool with acid until the set level is achieved – at which point the status indicator will revert to green and the warning will no longer be shown on the LCD.

## MAINTENANCE

Like all equipment the ChemfloPlus will look better and last longer if it is maintained and operated in accordance with these instructions.

### The ChemfloPlus Power Supply

The Power Supply has been design for operation in full sun and weather. However, it will benefit from being under cover. There is little maintenance required however – some Do's and Don'ts –

#### **Don't:**

- Install it in a small sealed enclosure (so it does not overheat)
- Install it in a very hot unventilated shed (so it does not overheat)
- Allow insects to nest in the unit (because they will prevent it from functioning)
- Install chemical drums under or close to the unit (to prevent corrosion)
- Forget about the unit once installed – it should be checked regularly to ensure that it is working for you

#### **Do:**

- Install it as per the instructions
- Check it regularly
- Make sure the pool balance is checked regularly

## Cleaning the Multi-electrode (Probe)

If the ChemfloPlus is consistently giving readings different from those obtained from a test kit, it may be necessary to clean the multi-electrode.

To do this:

- Remove the probe from the injection point by twisting the bayonet (or if fitted with a tapping band, by unscrewing the retaining nut) and remove the o-ring.
- Holding the cable, gently swirl the probe in a dilute solution of hydrochloric acid (pool acid) for two minutes
- Rinse the probe in clean water and then replace it in the injection point, making sure that the “o-ring” is in place.
- Twist bayonet to lock (or tighten nut with fingers)

## TROUBLE-SHOOTING

If there appears to be low or no Chlorine Residual:

1. Check stabiliser level is 40ppm – 60ppm. Add if necessary and wait for it to dissolve.
2. Have you added any chemical additives recently?
3. Check pool for phosphates and remove if necessary
4. Is the unit turned on and operating the filter pump?
5. If the unit is not running at all, check the fuse in the bottom of the unit.

## Operation Following a Power Failure

The ChemfloPlus unit comes with a timer function built into the operating software. The timer is a 24-hour type with quartz-crystal control. This Timer is backed-up by a Real-Time Clock (RTC) similar to those found in computers.

During a power failure the ChemfloPlus will keep time and maintain AutoMode functions.

If a Filter Cycle is active when power is returned the pump will be turned ON within 1 minute. The ChemfloPlus will keep all its settings and will not need to be re-programmed.

The ChemfloPlus is ideal for use in systems where repeated power cuts occur, such as off-peak power circuits and Queensland’s Tarriff33 system.

## WARRANTY

Controller (Power Pack)	24 months
Peristaltic Pumps	24 months
pH/ORP Sensor	18 months

Please refer to Waterco’s Warranty booklet for terms and conditions

#### OFFICES - AUSTRALIA

NSW - SYDNEY  
(HEAD OFFICE)  
Tel: +61 2 9898 8600

QLD - BRISBANE  
Tel: +61 7 3299 9900

VIC/TAS - MELBOURNE  
Tel: +61 3 9764 1211

WA - PERTH  
Tel: +61 8 9273 1900

SA/NT - ADELAIDE  
Tel: +61 8 8244 6000

ACT DISTRIBUTION  
Tel: +61 2 6280 6476

#### OFFICES - OVERSEAS

WATERCO (EUROPE) LIMITED  
Sittingbourne, Kent, UK  
Tel: +44 (0) 1795 521 733

WATERCO FRANCE  
Saint Priest, France  
Tel: +33 4 72 79 33 30

WATERCO (USA) INC  
Augusta, Georgia, USA  
Tel: +1 706 793 7291

WATERCO CANADA  
Longueuil, Quebec, Canada  
Tel: +1 450 748 1421

WATERCO (NZ) LIMITED  
Auckland, New Zealand  
Tel: +64 9 525 7570

WATERCO © LIMITED  
Guangzhou, China  
Tel: +86 20 3222 2180

WATERCO (FAR EAST) SDN BHD  
Selangor, Malaysia  
Tel: +60 3 6145 6000

PT WATERCO INDONESIA  
Jakarta, Indonesia  
Tel: +62 21 4585 1481

WATERCO SINGAPORE INTL PTE LTD  
Nehsons Building, Singapore  
Tel: +65 6344 2378

# WATERCO

Waterco Limited ABN 62 002 070 733

